



S1000-2

(UL ANSI:FR-4.0) Low CTE / Hi-Tg

特点

- 无铅兼容FR-4.0板材。
- 高Tg170℃(DSC), UV Blocking和AOI兼容。
- 高耐热性。
- 较低Z-CTE值。
- 优异的通孔可靠性。
- 优异的Anti-CAF性能。
- 低吸水性。

FEATURES

- Lead-free compatible FR-4.0 laminate.
- Tg 170°C (DSC), UV Blocking / AOI compatible.
- High heat resistance .
- Lower Z-axis CTE.
- Excellent through-hole reliability.
- Excellent anti-CAF performance.
- Low water absorption.

应用领域

广泛应用于计算机与通讯设备, 工业控制用高档仪器仪表、路由器等。

APPLICATIONS

Widely used in computer, communication equipment, precise apparatus and instrument, router, and etc.

GENERAL PROPERTIES

Test Item	Treatment Condition	Unit	Property Data		
			SPEC	Typical Value	
Tg	DSC	°C	≥170	180	
	DMA		-	185	
Flammability	C-48/23/50	-	V-0	V-0	
	E-24/125+des				
Volume Resistivity	After moisture resistance	MΩ-cm	≥ 10 ⁶	2.2×10 ⁸	
	E-24/125		≥ 10 ³	4.5×10 ⁶	
Surface Resistivity	After moisture resistance	MΩ	≥ 10 ⁴	7.9×10 ⁷	
	E-24/125		≥ 10 ³	1.7×10 ⁶	
Arc Resistance	D-48/50+D-0.5/23	S	≥ 60	100	
Dielectric Breakdown	D-48/50+D-0.5/23	KV	≥ 40	63	
Dielectric Constant (1MHz)	C-24/23/50	-	≤ 5.4	4.8	
Dissipation Factor (1MHz)	C-24/23/50	-	≤ 0.035	0.013	
Thermal Stress	Unetched	288°C, solder dip	> 10s	100s	
	Etched		No delamination	No delamination	
Peel Strength	1oz	N/mm	≥ 1.05	1.38	
	Cu. Foil		≥ 0.70	1.07	
Flexural Strength	LW	MPa	≥ 415	562	
	CW		≥ 345	518	
Water Absorption	D-24/23	%	≤ 0.5	0.10	
CTE Z-axis	Before Tg	TMA	PPM/°C	≤60	45
	After Tg	TMA	PPM/°C	≤300	220
		50~260°C	TMA	%	≤3.0
Td	10°C/min, N ₂ , 5%Wt Loss	°C	≥340	345	
T288	TMA	min	≥15	20	
T260	TMA	min	≥30	60	
T300	TMA	min	≥2	5	
CTI	IEC60112 Method	V	PLC 3(175V--249V)	PLC 3	

Remarks: 1.Specification sheet:IPC-4101/126, is for your reference only.

2.All the typical value is based on the 1.6mm specimen,while the Tg is for specimen ≥0.50mm.

3.All the typical value listed above is for your reference only, please turn to Shengyi Technology Co., Ltd. for detailed information, and all rights from this data sheet are reserved by Shengyi Technology Co., Ltd.

Explanations: C = Humidity conditioning; D = Immersion conditioning in distilled water; E = Temperature conditioning.

The figures following the letter symbols indicate with the first digit the duration of the preconditioning in hours, with the second digit the preconditioning temperature in °C and with the third digit the relative humidity.




S1000-2

(UL ANSI:FR-4.0)Low CTE / Hi- Tg


High layer count application evaluation

L1	H 02
L1-2	prepreg 2*106
L2	H 02
L2-3	Care 0.076
L3	I 02
L3-4	prepreg 1080H+3313
L4	H 02
L4-5	Care 0.089
L5	I 02
L5-6	prepreg 106+2116
L6	H 02
L6-7	Care 0.114
L7	H 02
L7-8	prepreg 2*1080H
L8	I 02
L8-9	Care 0.114
L9	Z 02
L9-10	prepreg 2*1080H
L10	I 02
L10-11	Care 0.100
L11	I 02
L11-12	prepreg 2*1080H
L12	Z 02
L12-13	Care 0.114
L13	I 02
L13-14	prepreg 2*1080H
L14	H 02
L14-15	Care 0.114
L15	H 02
L15-16	prepreg 2116+106
L16	I 02
L16-17	Care 0.089
L17	H 02
L17-18	prepreg 3313+1080H
L18	I 02
L18-19	Care 0.076
L19	H 02
L19-20	prepreg 2*106
L20	H 02

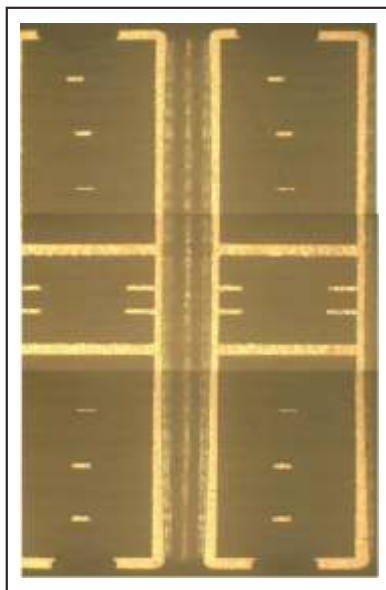


Structure : 20-Layer,
0.25mm/0.8Pitch
Overall thickness : 2.8mm
Test : 260°C reflow 5times

High Thermal Shock Resistance

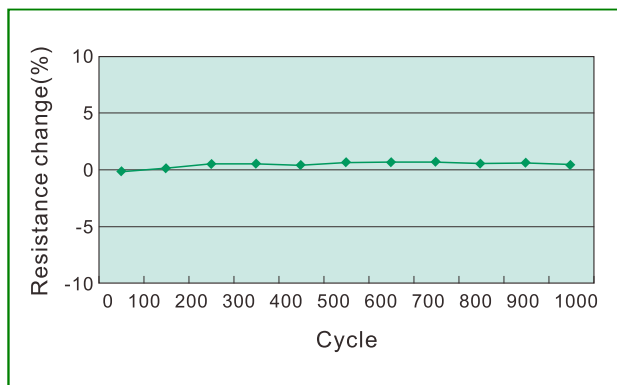

Test Sample: S1000-2 multi-layer board
Test Method: Q1000 (-45°C ~ 130°C)
Test Results: Pass 1000 cycles

Anti-caf

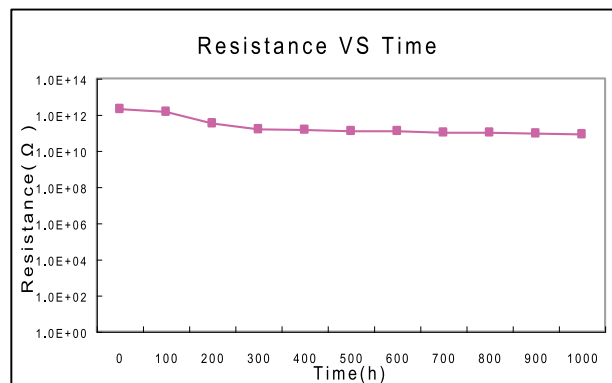

Test Condition: 85°C/85%RH, DC 50V
Sample Construction: 1.6H/H pitch 0.8 mm
T/H diameter 0.30 mm

PURCHASING INFORMATION

Thickness	Copper foil	Standard Size	
0.05mm to 3.2mm	12 μ m	1,020×1,220mm (40" ×48")	915×1,220mm (36" ×48")
	to 105 μ m	1,070×1,220mm (42" ×48")	

- ❖ Other sheet size and thickness could be available upon request.
- ❖ UL 认可单、双面PCB板最小厚度0.38mm。



S1000-2B PREPREG

(UL ANSI:FR-4.0) Bonding Prepreg For S1000-2

PREPREG PARAMETERS


Glass fabric type	Resin content (%)	Cured thickness (mm)	DK(1GHz)	Df(1GHz)	Standard size (Roll type)
106/1037	70	0.046	4.0	0.020	1.260m X150m
	73	0.052	3.9	0.021	
	76	0.060	3.8	0.022	
	78	0.065	3.8	0.022	
1080/1078	62	0.070	4.2	0.019	1.260m X300m
	65	0.077	4.1	0.019	
	68	0.086	4.0	0.020	
2313/3313	54	0.094	4.4	0.017	1.260m X250m
	57	0.102	4.3	0.017	
2116	53	0.117	4.4	0.017	1.260m X250m
	56	0.127	4.3	0.017	
	58	0.134	4.3	0.018	
1506	44	0.150	4.6	0.015	1.260m X150m
	49	0.170	4.5	0.016	
7628	43	0.187	4.6	0.014	1.260m X150m
	45	0.196	4.6	0.015	
	48	0.210	4.5	0.016	
	50	0.222	4.5	0.016	

Remark: DK and Df are tested according to IPC TM-650 2.5.5.9
Prepreg type, resin content and size could be available upon request.

PREPREG TEST METHOD

- Resin Content, Resin Flow, Gel Time: IPC-TM-650

HOT PRESSING CYCLE

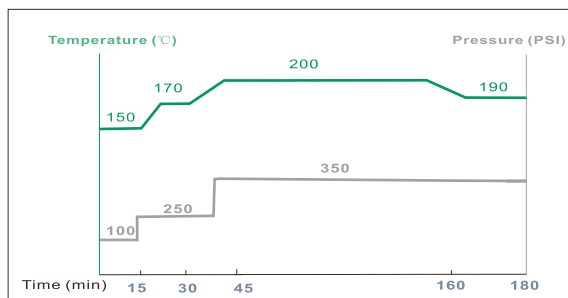

Heat-up rate: 1.0~2.5°C/min (80~140°C)
Curing time: >60min (185~195°C)
The hot pressing parameters is for your reference only,
please turn to
Shengyi Technology Co., Ltd for detailed information.

STORAGE CONDITION

- Three months when stored at <23 °C and <50% RH .
- Six months when stored at <5°C. Normalize in room temperature for at least 4h before using.
- Beware of moisture, always keep wrapped in damp-proof material. Were kept in normal condition, prepreg might absorb moisture and its bonding strength would be weakened.
- Avoid UV-rays and strong light.